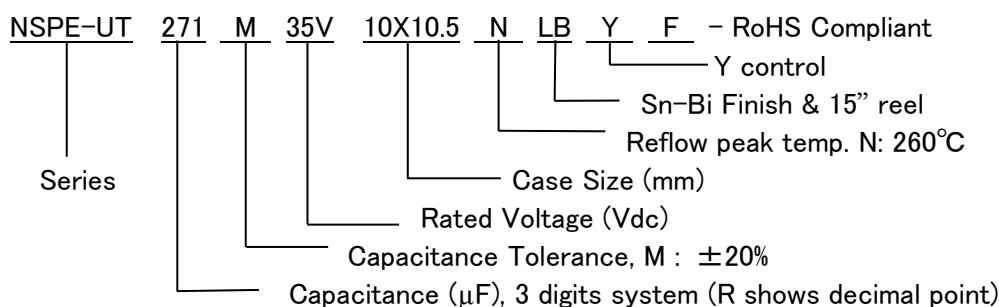


150°C LEAD FREE REFLOW SOLDERING.
ALUMINUM ELECTROLYTIC CAPACITOR, POLARIZED
FEATURES
G **RoHS COMPLIANT**

- * NSPE-UT capacitors are the electrolytic capacitors with hybrid cathode construction, which is realized by adding electro conductive polymer together with liquid electrolyte as cathode.
- * Structure of hybrid cathode electrolyte keeps their self-healing function as aluminum electrolytic capacitors.
- * NSPE-UT series has stable characteristics at temperature of wide range (-40 to +150°C)
- * Lead free terminals

CHARACTERISTICS

Rated Voltage Range	25 ~ 80Vdc				
Capacitance Range	22 ~ 680μF				
Operating Temperature Range	D=Φ6.3 : -40 ~ +135°C				
	D≥Φ8 : -40 ~ +150°C				
Capacitance Tolerance (120Hz/20°C)	±20%(M)				
Max. Leakage Current After 2 minutes @20°C	0.01CV				
Rated Voltage (V)	25	35	50	63	80
Surge Voltage (V)	32	44	63	79	100
Max. Tan δ at 120Hz & 20°C	0.14	0.12	0.10	0.08	0.08
Temperature Stability Impedance Ratio @ 120Hz	Z-40°C/Z+20°C	1.0~2.5			
	Z+125°C/Z+20°C	0.6~1.0			
	Z+135°C/Z+20°C				
	Z+150°C/Z+20°C				
Load Life Test 150°C With Rated Voltage	Test	Φ8~Φ10 : 4000hrs			
	Capacitance Change	Within ±35% of initial measured value			
	Tan δ	Less than 200% of specified value			
	ESR	Less than 250% of specified value			
	Leakage Current	Less than specified value			
Load Life Test 125°C & 135°C With Rated Voltage	Test	4000hrs			
	Capacitance Change	Within ±30% of initial measured value			
	Tan δ	Less than 200% of specified value			
	ESR	Less than 200% of specified value			
	Leakage Current	Less than specified value			
Resistance to Soldering Heat	After reflow soldering and then being stabilized at +20°C, capacitors shall meet the following limits.				
	Capacitance Change	Within ±10% of initial measured value			
	Tan δ	Less than specified value			
	ESR	Less than 130% of specified value			
	Leakage Current	Less than specified value			

PART NUMBER SYSTEM


STANDARD PRODUCTS TABLE ϕ DXL :

R.V.(Vdc) Cap.(μ F)	25	35	50	63	80
22				6.3X8	
33			6.3X8		8X10.5
47				8X10.5	
56				8X10.5	10X10.5
68		6.3X8	8X10.5		10X12.5
82				10X10.5	10X13.8
100	6.3X8			10X10.5 10X12.5	10X16.5
120			10X10.5	10X12.5 10X13.8	
150		8X10.5	10X12.5	10X13.8 10X16.5	
180			10X13.8	10X16.5	
220	8X10.5		10X16.5		
270		10X10.5			
330	10X10.5	10X12.5			
360		10X13.8			
470	10X12.5	10X16.5			
560	10X13.8				
680	10X16.5				

MAXIMUM ESR ($m\Omega$ at 100kHz & 20°C)

R.V.(Vdc) Cap.(μ F)	25	35	50	63	80
22				60	
33			40		45
47				40	
56				40	36
68		35	30		32
82				30	28
100	30			30 22	16
120			28	22 20	
150		20	19	20 15	
180			18	15	
220	20		13		
270		18			
330	18	14			
360		13			
470	14	11			
560	13				
680	11				

MAXIMUM PERMISSIBLE RIPPLE CURRENT (mA r.m.s. at 100kHz & 125°C/135°C/150°C)

R.V.(Vdc) Cap.(μF)	25			35			50		
	125°C	135°C	150°C	125°C	135°C	150°C	125°C	135°C	150°C
33							2200	1500	-
68				2700	1800	-	2900	2100	1100
100	2700	1800	-						
120							3600	2600	1400
150				3500	2500	1200	3900	2800	1600
180							4400	3100	1800
220	3500	2500	1200				5100	3700	2100
270				4000	3100	1600			
330	4000	3100	1600	4700	3400	1800			
360				5200	3700	2000			
470	4700	3400	1800	5700	4100	2250			
560	5200	3700	2000						
680	5700	4100	2250						

R.V.(Vdc) Cap.(μF)	63			80		
	125°C	135°C	150°C	125°C	135°C	150°C
22	2000	1400	-			
33				2500	1700	900
47	2700	1900	1000			
56	2700	1900	1000	3200	2200	1100
68				3500	2400	1300
82	3400	2400	1250	3900	2600	1500
100	3400 3700	2400 2600	1250 1450	4400	3200	1800
120	3700 4100	2600 2800	1450 1700			
150	4100 4900	2800 3500	1700 2000			
180	4900	3500	2000			

MULTIPLIER FOR RIPPLE CURRENT (Frequency coefficient)


$100 \leq F < 1k$	$1k \leq F < 10k$	$10k \leq F < 100k$	$100k \leq F < 500k$
0.15	0.35	0.65	1.00

PRODUCTS AND SPECIFICATIONS


Part number	R.V. (V.DC)	Cap. (μ F)	tan δ	ESR ($m\Omega$) (100kHz, 20°C)	Max.Ripple Current mA r.m.s. (100kHz)			Life
					125°C	135°C	150°C	
NSPE-UT101M25V6.3X8NLBYF	25V	100	0.14	30	2700	1800	-	4000
NSPE-UT221M25V8X10.5NLBYF		220	0.14	20	3500	2500	1200	4000
NSPE-UT331M25V10X10.5NLBYF		330	0.14	18	4000	3100	1600	4000
NSPE-UT471M25V10X12.5NLBYF		470	0.14	14	4700	3400	1800	4000
NSPE-UT561M25V10X13.8NLBYF		560	0.14	13	5200	3700	2000	4000
NSPE-UT681M25V10X16.5NLBYF		680	0.14	11	5700	4100	2250	4000
NSPE-UT680M35V6.3X8NLBYF	35V	68	0.12	35	2700	1800	-	4000
NSPE-UT151M35V8X10.5NLBYF		150	0.12	20	3500	2500	1200	4000
NSPE-UT271M35V10X10.5NLBYF		270	0.12	18	4000	3100	1600	4000
NSPE-UT331M35V10X12.5NLBYF		330	0.12	14	4700	3400	1800	4000
NSPE-UT361M35V10X13.8NLBYF		360	0.12	13	5200	3700	2000	4000
NSPE-UT471M35V10X16.5NLBYF		470	0.12	11	5700	4100	2250	4000
NSPE-UT330M50V6.3X8NLBYF	50V	33	0.10	40	2200	1500	-	4000
NSPE-UT680M50V8X10.5NLBYF		68	0.10	30	2900	2100	1100	4000
NSPE-UT121M50V10X10.5NLBYF		120	0.10	28	3600	2600	1400	4000
NSPE-UT151M50V10X12.5NLBYF		150	0.10	19	3900	2800	1600	4000
NSPE-UT181M50V10X13.8NLBYF		180	0.10	18	4400	3100	1800	4000
NSPE-UT221M50V10X16.5NLBYF		220	0.10	13	5100	3700	2100	4000
NSPE-UT220M63V6.3X8NLBYF	63V	22	0.08	60	2000	1400	-	4000
NSPE-UT470M63V8X10.5NLBYF		47	0.08	40	2700	1900	1000	4000
NSPE-UT560M63V8X10.5NLBYF		56	0.08	40	2700	1900	1000	4000
NSPE-UT820M63V10X10.5NLBYF		82	0.08	30	3400	2400	1250	4000
NSPE-UT101M63V10X10.5NLBYF		100	0.08	30	3400	2400	1250	4000
NSPE-UT101M63V10X12.5NLBYF		100	0.08	22	3700	2600	1450	4000
NSPE-UT121M63V10X12.5NLBYF		120	0.08	22	3700	2600	1450	4000
NSPE-UT121M63V10X13.8NLBYF		120	0.08	20	4100	2800	1700	4000
NSPE-UT151M63V10X13.8NLBYF		150	0.08	20	4100	2800	1700	4000
NSPE-UT151M63V10X16.5NLBYF		150	0.08	15	4900	3500	2000	4000
NSPE-UT181M63V10X16.5NLBYF		180	0.08	15	4900	3500	2000	4000
NSPE-UT330M80V8X10.5NLBYF		80V	33	0.08	45	2500	1700	900
NSPE-UT560M80V10X10.5NLBYF	56		0.08	36	3200	2200	1100	4000
NSPE-UT680M80V10X12.5NLBYF	68		0.08	32	3500	2400	1300	4000
NSPE-UT820M80V10X13.8NLBYF	82		0.08	28	3900	2600	1500	4000
NSPE-UT101M80V10X16.5NLBYF	100		0.08	16	4400	3200	1800	4000

RECOMMEND LAND PATTERN (mm)


Case Size	a	b	c
Φ 6.3	1.8	3.6	1.8
Φ 8	2.8	4.1	2.1
Φ 10	4.3	4.4	2.5

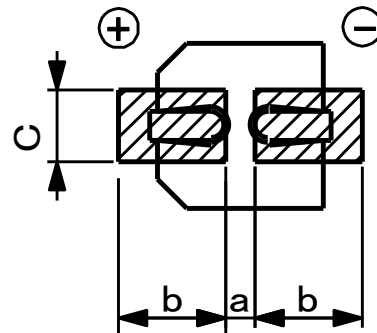

DIMENSIONS (mm)

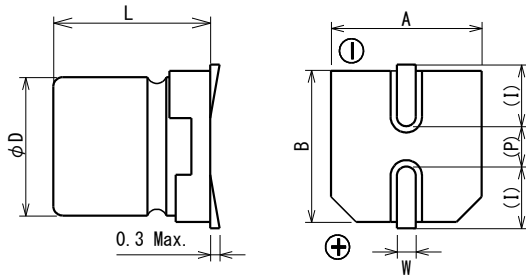

MARKING




Color : Blue

Note : L dimension does not include terminal deflection.

Case Size	$\phi D \pm 0.5$	L max.	$A \pm 0.2$	$B \pm 0.2$	(I)	W	(P)
6.3X8	6.3	8.0	6.6	6.6	2.5	0.5~0.8	2.2
8X10.5	8	10.5	8.3	8.3	2.9	0.7~1.0	3.2
10X10.5	10	10.5	10.3	10.3	3.2	1.0~1.4	4.6
10X12.5	10	12.5	10.3	10.3	3.2	1.0~1.4	4.6
10X13.8	10	13.8	10.3	10.3	3.2	1.0~1.4	4.6
10X16.5	10	16.5	10.3	10.3	3.2	1.0~1.4	4.6

() : Reference value

PERMISSIBLE REFLOW TEMPERATURE PROFILE

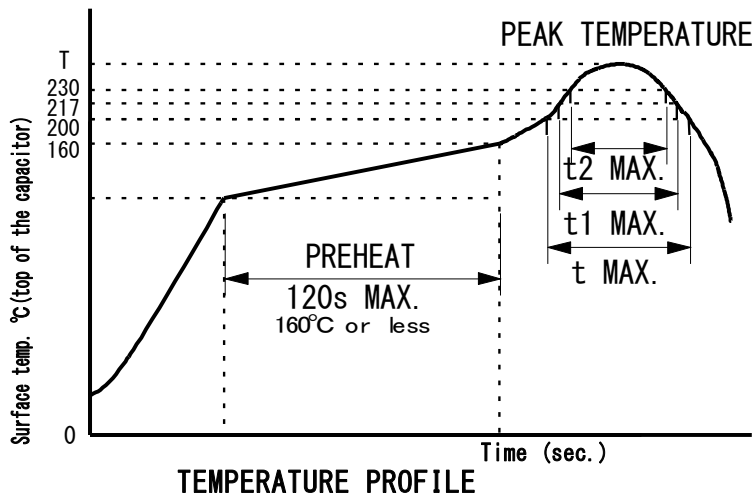

Rated Voltage : 25~50Vdc

Size	Peak temperature (T)	Time for more than 200°C (t)	Time for more than 217°C (t1)	Time for more than 230°C (t2)	Reflow Cycle(max.)
$\Phi 6.3$	Less than 260°C	Within 70sec.	Within 40sec.	Within 30sec.	2
$\Phi 8, \Phi 10$	Less than 260°C	Within 70sec.	Within 40sec.	Within 30sec.	1
	Less than 245°C	Within 70sec.	Within 50sec.	Within 40sec.	2

Rated Voltage : 63~80Vdc


Size	Peak temperature (T)	Time for more than 200°C (t)	Time for more than 217°C (t1)	Time for more than 230°C (t2)	Reflow Cycle(max.)
$\Phi 6.3 \sim \Phi 10$	Less than 260°C	Within 70sec.	Within 40sec.	Within 30sec.	1
	Less than 245°C	Within 70sec.	Within 40sec.	Within 30sec.	2

Capacitor can withstand two reflow processes on the above condition.
 Second reflow shall be taken after more than one hour natural cooling time
 and taken after the return to normal temperatures of PCB board and components.

TAPING SPECIFICATIONS :


1. Leader and ending tape : Min. 10 empty pockets and 20 cm of cover tape.
2. Connection : Within 3 connections per reel.

CARRIER TAPE DIMENSIONS (mm) :

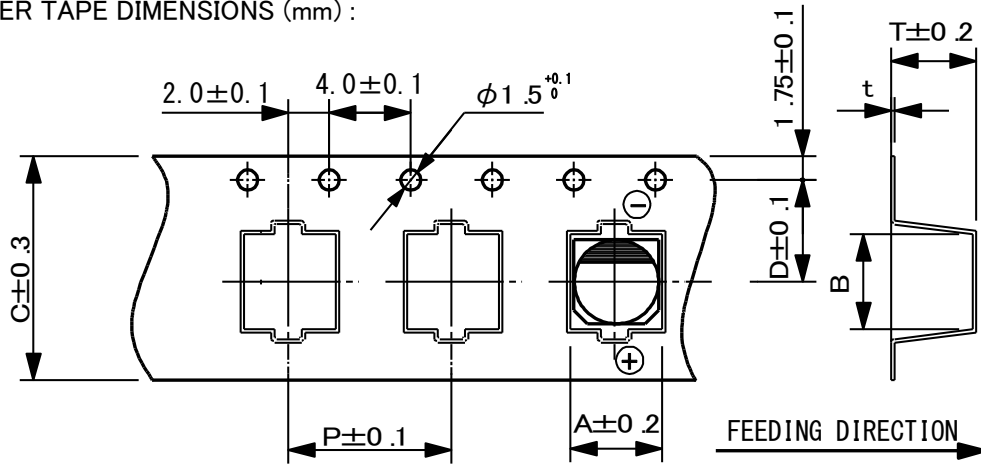

Case Size	A ± 0.2	B ± 0.2	C ± 0.3	D ± 0.1	P ± 0.1	T ± 0.2	t Max.
6.3X8	7.0	7.0	16.0	7.5	12.0	8.2	0.6
8X10.5	8.7	8.7	24.0	11.5	16.0	11.1	0.6
10X10.5	10.7	10.7	24.0	11.5	16.0	11.2	0.6
10X12.5	10.7	10.7	24.0	11.5	16.0	13.3	0.6
10X13.8	10.7	10.7	24.0	11.5	16.0	14.6	0.6
10X16.5	10.7	10.7	24.0	11.5	16.0	17.5	0.6

REEL DIMENSIONS (mm) :

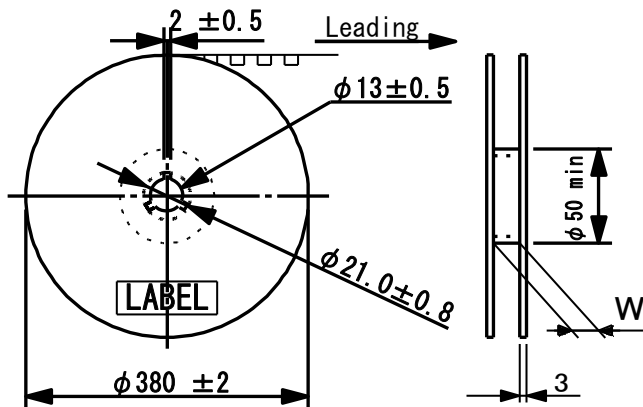

Case Size	W	Q'ty per reel (pcs)
		TR15 (380mm)
6.3X8	18	900
8X10.5	26	500
10X10.5	26	500
10X12.5	26	400
10X13.8	26	400
10X16.5	26	325